


Manual of Solar LED Flood Light



PRODUCT DATA

Solar Panel	5V, 3.5W
LED	48pcs * SMD2835, 8W
Lithium Battery	3.2V, 5500mAh
Charging Time	6~10 hrs
Working Time	8~12 hrs
Working Mode	1) 30% bright at night; when people pass by, full bright 2) Off at night, full bright when people pass by 3) Constant on
Lumens	800lm
IP Rate	IP65
Extension Cord	3M
Materials	ABS + PC
Installation Way	One piece; Solar panel and LED lamp installed sparately
Motion Sensing Range	5-8M

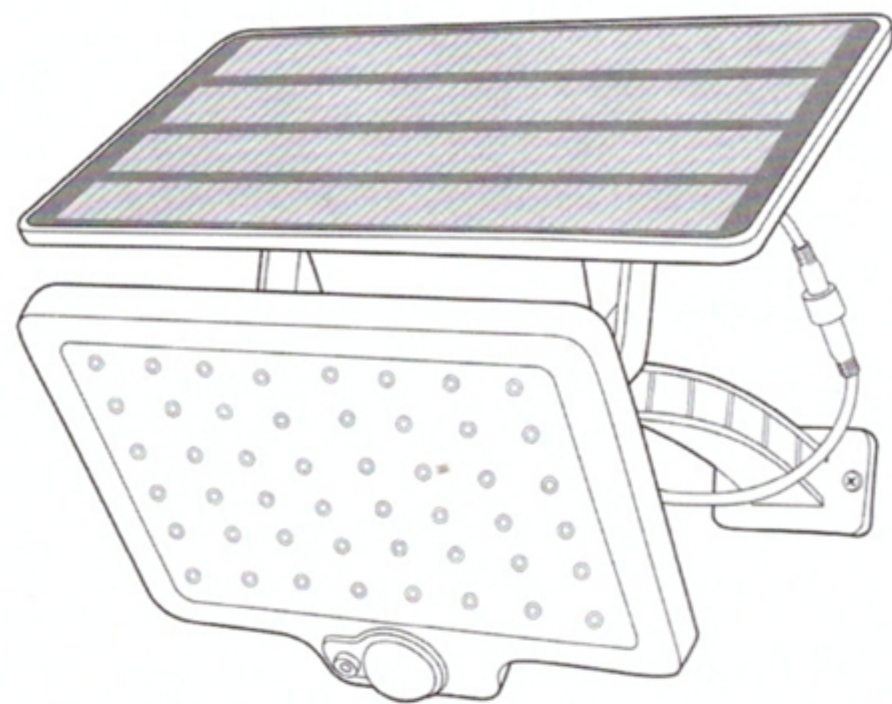


DH-SF003

PACKAGE INCLUDE (1 Pack)



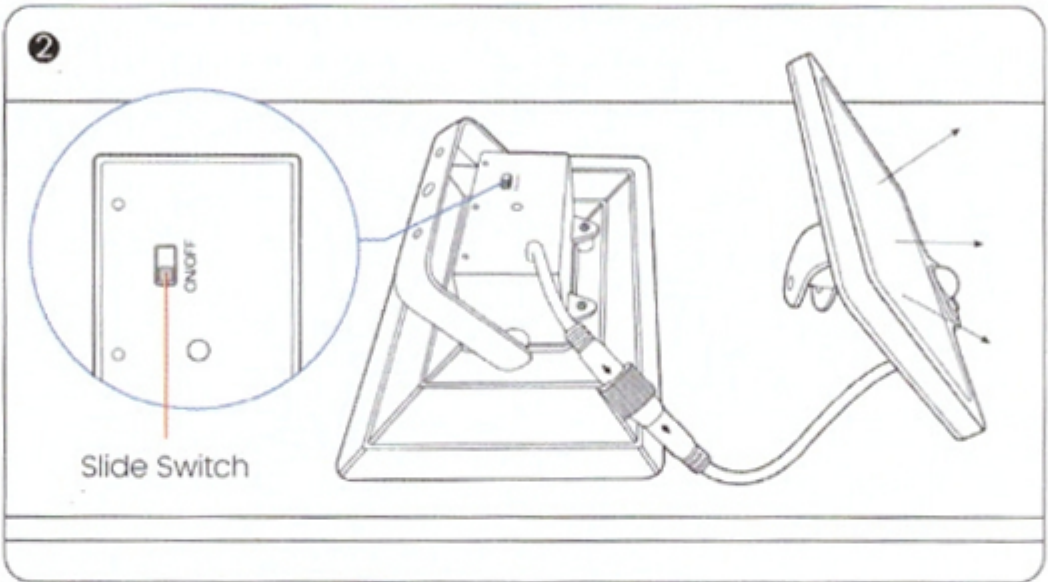
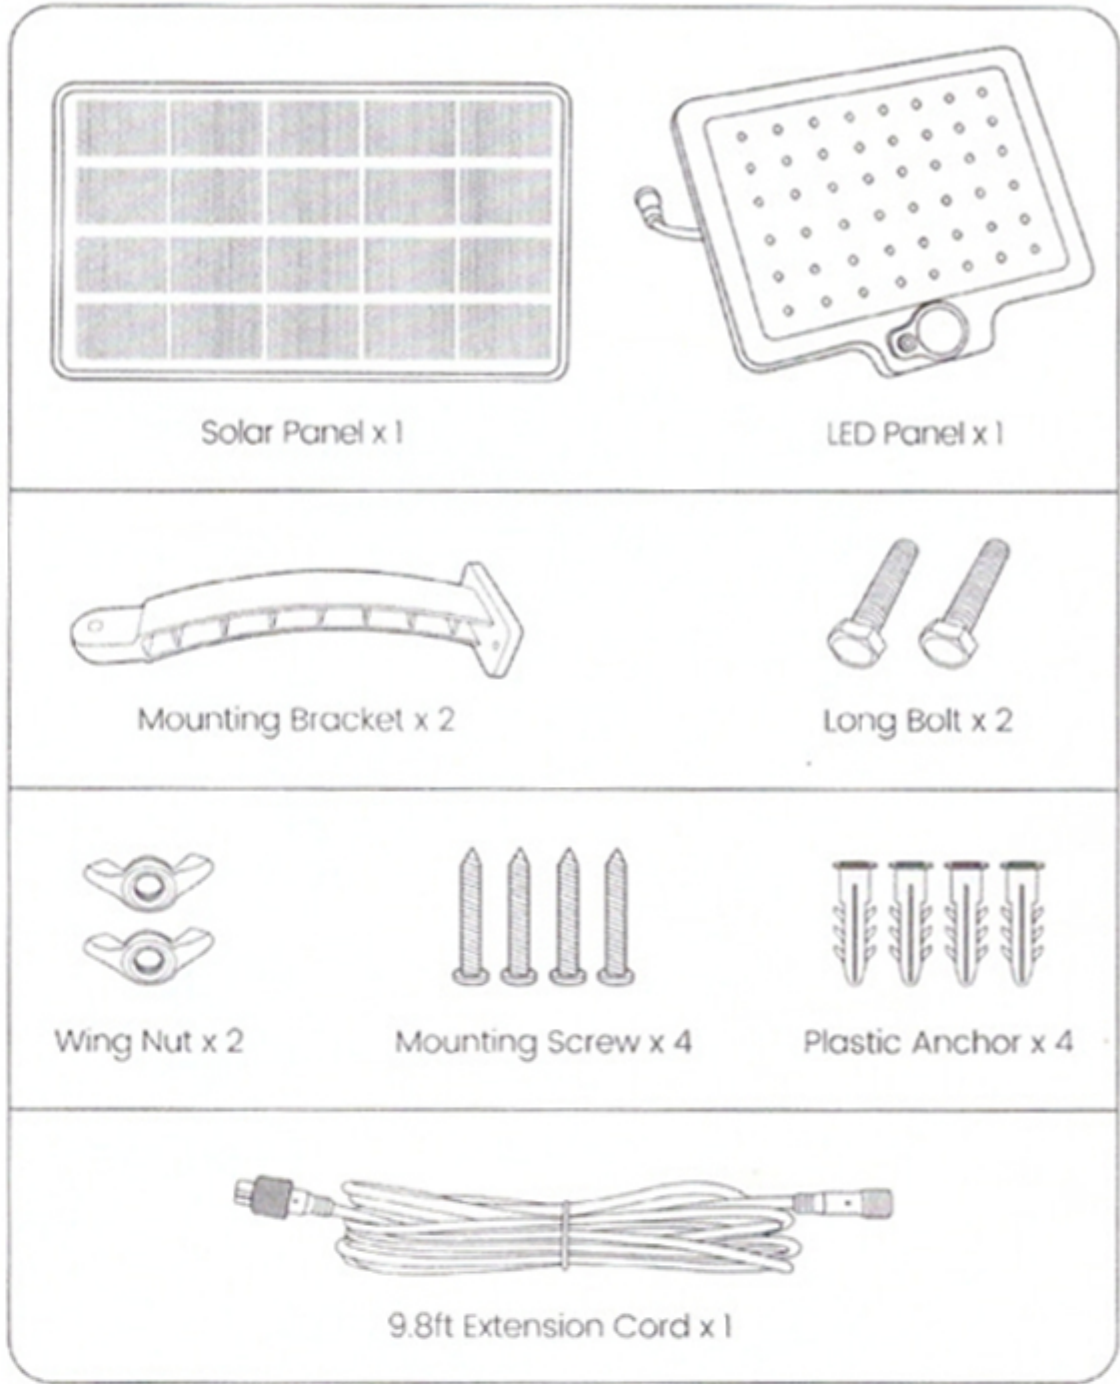


PRODUCT OVERVIEW

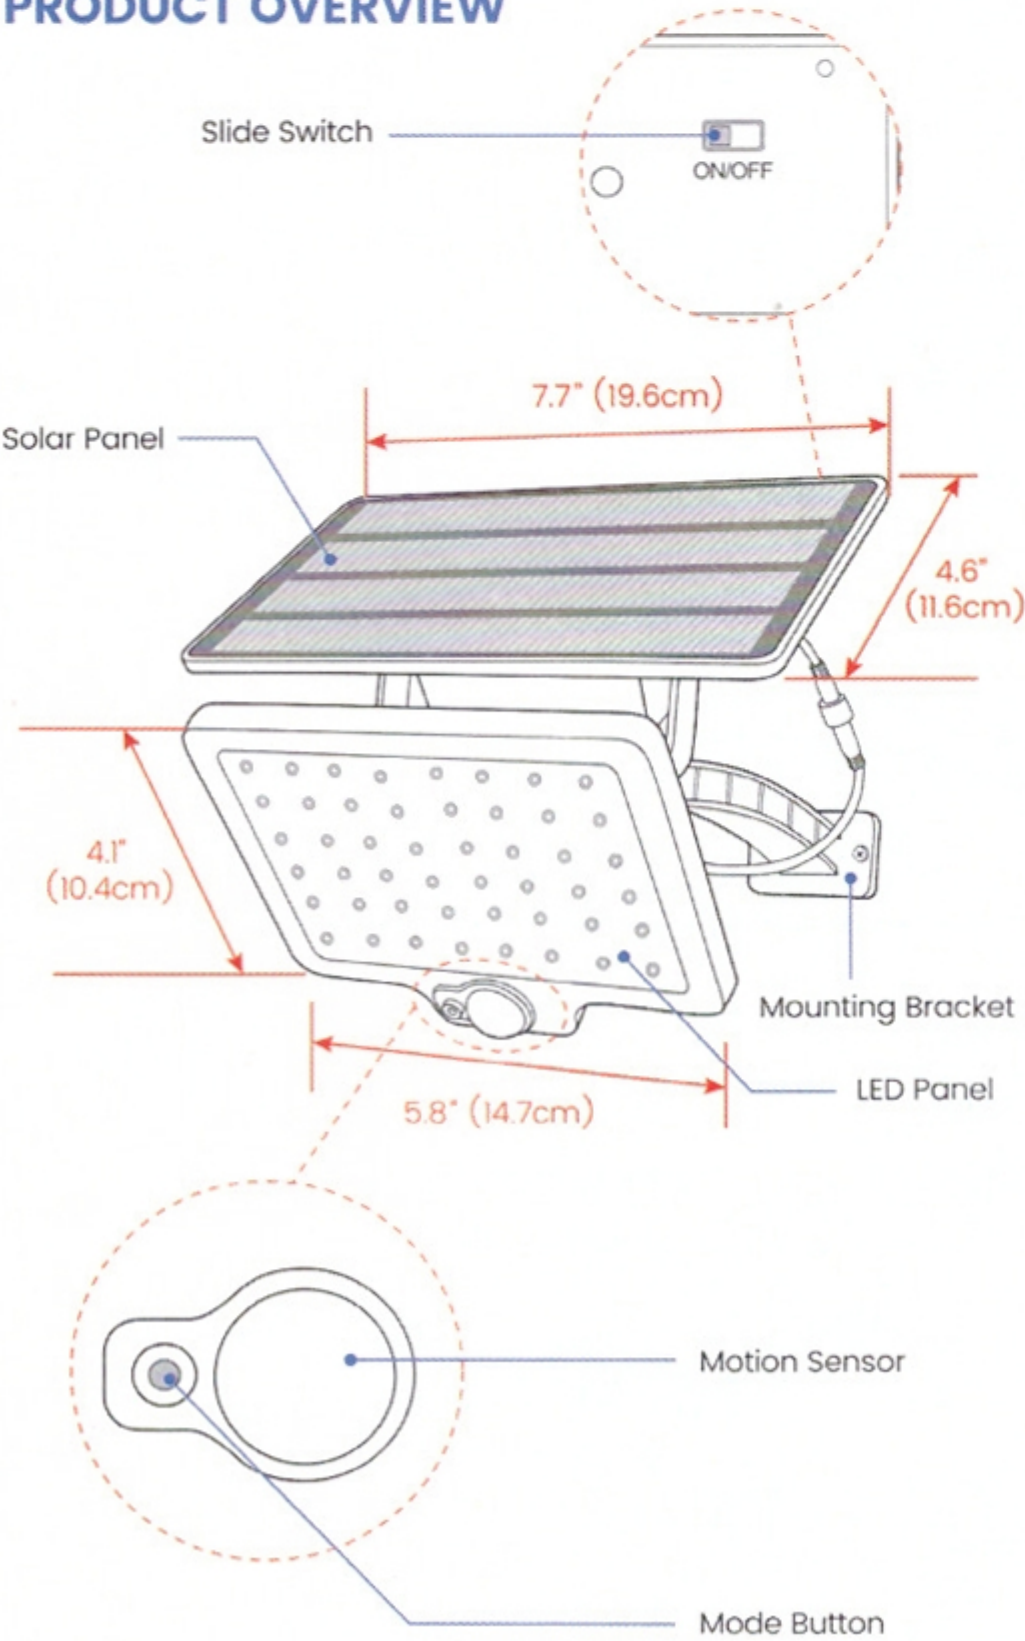


ASSEMBLE STEPS

Assemble the solar panel & mounting bracket:

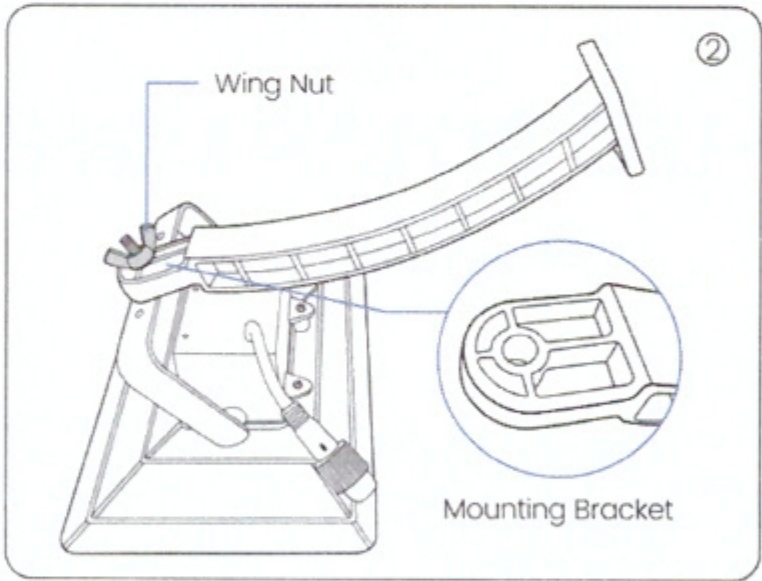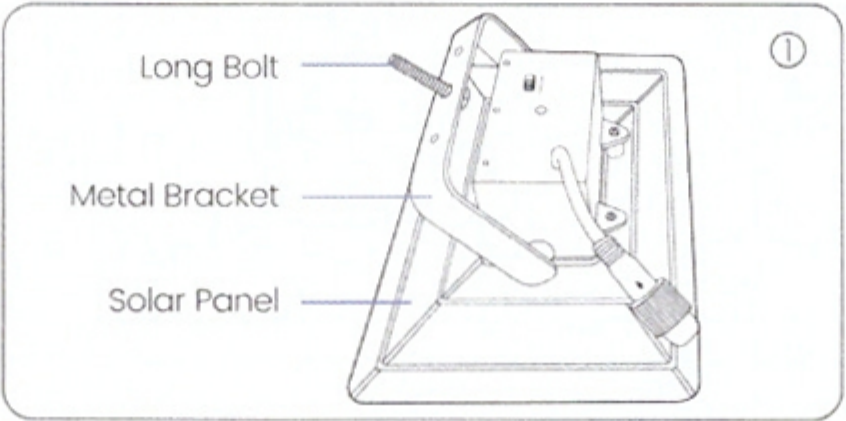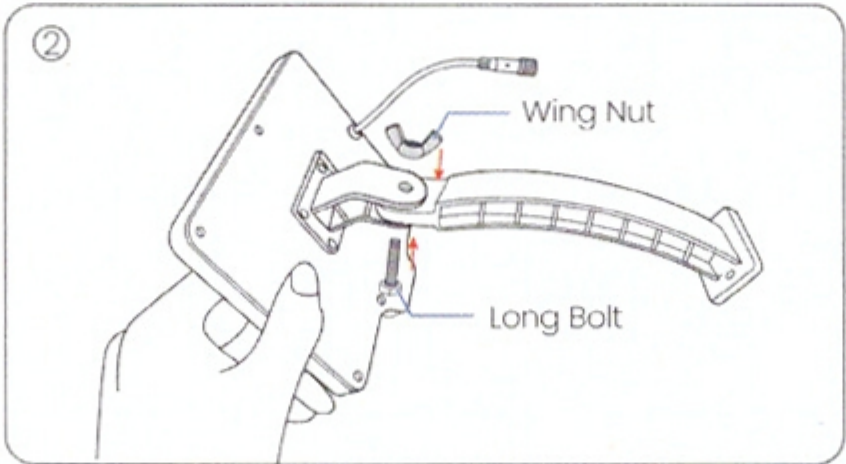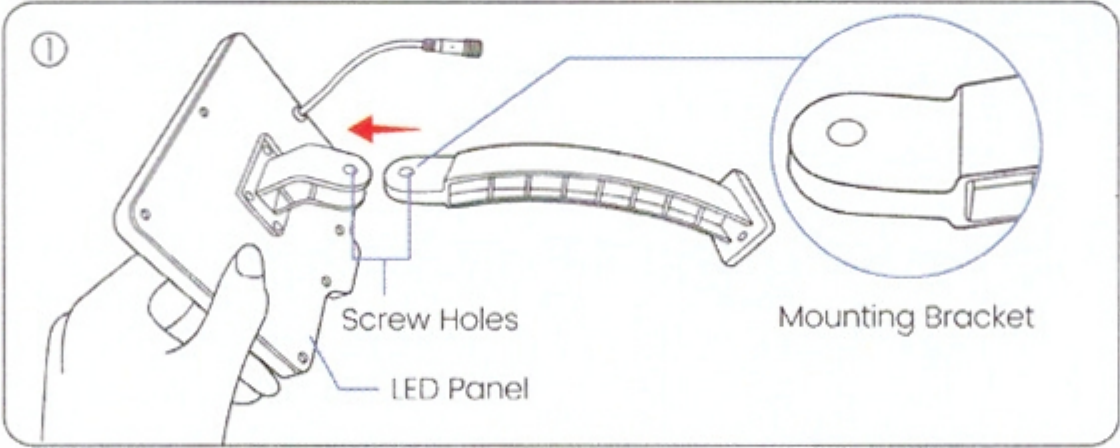

Connect the LED panel and the slar panel with the extension cord and screw te cap tight:

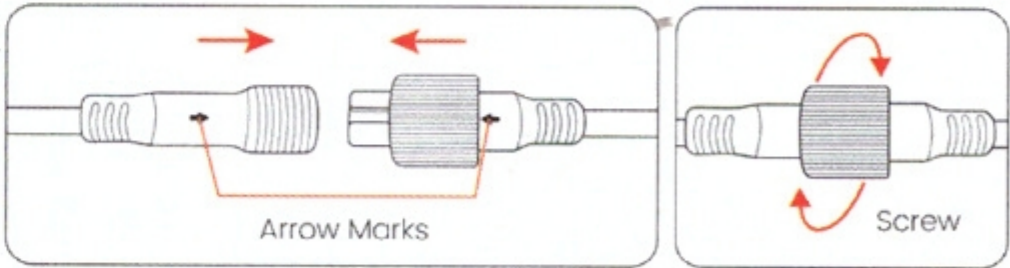

MOUNTING ON A WALL

1. Use the mounting bracket to mark positions and drill 2 holes on the mounting surface.

